

- LIGHT SOURCES: Three
- CANOPY: 3 x Copper 62mm (2.5') diameter
- LAMPING: 10w xenon
- LENGTH OF COPPER: 6000mm (20') maximum
- MATERIALS: Blown glass, copper and steel canopy, flexible copper tubing and copper hardware
- WEIGHT: Approximately 8kg (17.6lb)
- TRANSFORMERS: Remote mounted
- CONNECTION: Integral to canopy
- INSTALLATION: Preset lengths, composed during installation

DESCRIPTION

The 38.3m is a 38 series chandelier with 3 light sources, 2 moons and three independant canopies. The 38 series is an extension of the blown glass technique introduced in the 28 series. In this case, there are 4-6 cavities blown within each pendant, 3 of which house light sources, while the remainder are deep enough to house plants.

Electricity and suspension are achieved using stiff copper tubing, which is allowed to tangle and crinkle, seemingly without regard for gravity. Once in a while these copper tubes loop around moon white planters, which appear to have escaped from the confines of the lit clear glass spheres.

APPLICATIONS

The 38.3m can be used on its own, or like other 38 series chandeliers works well in applications where the intent is to create a horizontal spread of pendants and foliage. This chandelier works best in groupings where the copper can be manipulated between multiple canopies to allow for limitless composition. Additionally, this chandelier can have canopies that mount onto a wall, as long as one supporting canopy is suspended from the ceiling.

Popular residential and commercial applications include clusters over tables in dining rooms and restaurants, accessory lighting in living rooms and baths, linear configurations over bars and kitchen islands, large clusters in foyers and lobbies in both private and public spaces, as well as single chandeliers as points of interest such as an herb garden.

NOTES

- + The installation of the 38 is more involved than other chandeliers due to the manipulation and composition of the copper tubing.
- + These standard chandeliers can be used in an infinite variety of groupings to create cohesive installations, with single pendants bridging from canopy to canopy.
- + Air plants and/or succulents recommended (not included).
- + Prior to watering the plants, please wait for the glass to cool down.


Worldwide patents pending
Made in Vancouver, Canada

BOCCI Vancouver
info@bocci.ca
www.bocci.ca

BOCCI Berlin
europe@bocci.ca
www.bocci.ca

38.3m

Design by Omer Arbel
PRODUCT SPECIFICATION

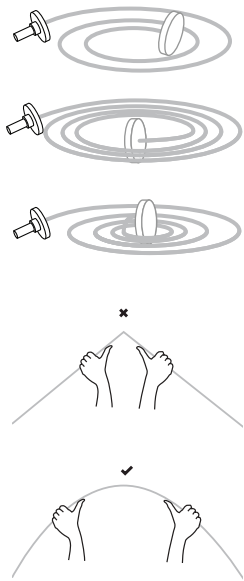


1

Separate the copper tubes according to length.

Very carefully uncoil the copper tube with both hands to avoid kinking.

Note: be very careful not to overbend the copper tubes as it will leave a permanent kink that can not be removed.

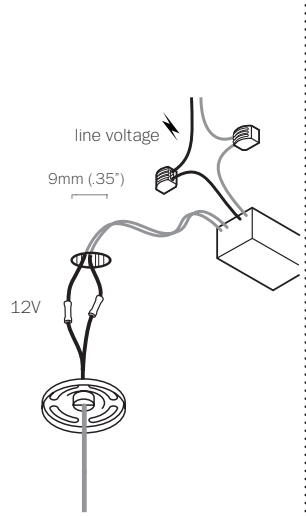

2

Mount transformer remotely. Drill a 9mm diameter hole in ceiling material. Route output wiring from transformer to fixture location. Pull low voltage house wire through the hole


Join transformer wiring to mini canopy wiring using #16 butt splices (stagger the splices). Use raw butt splices and heat shrink to simplify the installation. Connect the transformer leads to line voltage.

Xenon/Halogen/LED: Connect the coaxial cable to the open slots in the terminal block on the 12V side of the transformer. Ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.

Note:


Standard junction boxes are not compatible with the 38.3m. Bocci recommends mounting transformers remotely in a close by, accessible and hidden location for ease of long term maintenance.

Up to 5 light sources may be connected to a single class 2 transformer.

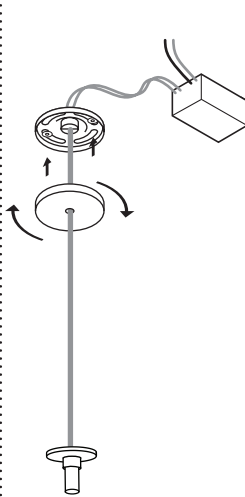

3

Starting with the shortest copper length, affix mini-canopy to ceiling surface with fasteners provided. Twist the threaded canopy cover plate into place and tighten the set screw with the allen key provided.

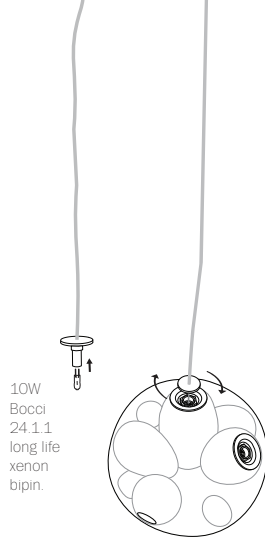


10W
Bocci
24.1.1
long life
xenon
bipin.

4

Locate the other tubes in the desired configuration and install the remaining canopies one at a time, gently bending them with both hands to avoid kinking.

The composition of the chandelier is determined by which tubes are chosen to connect to the remaining pendant mounting points.

In most configurations the longer tubes will coordinate with the longer pendants.

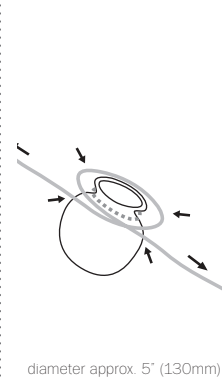


diameter approx. 5" (130mm)

5

Prior to connecting the remaining tubes to the pendants, be sure to install the glass moons, one moon per tube.


When installing the moons, first gently form a loop with the tube approximately 5" (130 mm) in diameter in the location of your choice. Insert the moon into the loop and tighten the loop around the moon, using the glass lip as a guide.

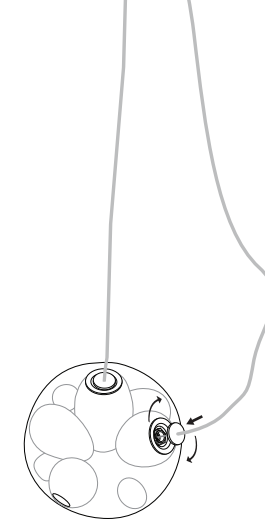

6

Once the moons are installed, install lamps before connecting the tubes to the pendants.

Connect the tubes to the pendants by tightening the center cap by hand. Shape the tubes in any direction to create a composition to your liking, taking care to fill gaps and create an appearance of weightlessness.

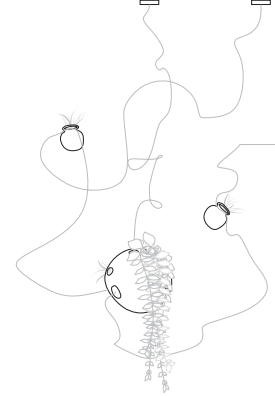

6

Place the plants into the pendant and moon cavities as desired. Reshape the tubes as needed.

Note: Bocci recommends succulents and/or air plants (plants not included).

Turn chandelier on.

*

Purchase replacement lamps online at www.bocci.ca/lamps

For additional assistance, please contact Bocci:

BOCCI Vancouver

info@bocci.ca
www.bocci.ca

BOCCI Berlin

europe@bocci.ca
www.bocci.ca

Made in Canada

38.3m

Design by Omer Arbel
INSTALLATION INSTRUCTIONS