




tile

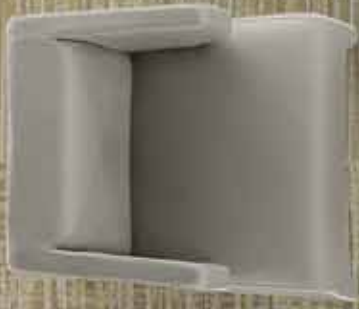

technique tile, varnish tile and print tile

DESIGN IS PROCESS

NATURAL PALETTE



blend tile + hint tile



MAKE A VIBRANT DISCOVERY

Experiments with color extracted from rust, logwood and onion skins yield a palette of raw sophistication. Naturally dyed weavings of exquisite fiber inform the patterns.

DESIGN IS PROCESS



technique tile



vanish tile



blend tile



hint tile

TECHNIQUE • VANISH • HINT
shown in technique



black tea 22516




coffee 22755



walnut hull 22750



maple 22761



beet 22880




carob 22585



tea tree 22550



birch 22170



sumac 22504



indigo 22496




logwood 22505

BLEND



fustic indigo 25516



cutch 25755



rust 25750



lac 25761



cochineal 25880



mulberry 25585



nettle 25550




sorrel 25170



cornflower 25504



foxglove 25496



woad 25505

product specifications

Face weight: technique: 34 oz
hint: 34 oz
vanish: 34 oz
blend: 34 oz

Fiber: Eco Solution Q®

Backing: EcoWorx®



For more information on **Natural Palette** contact your local Shaw Contract Group representative, visit us at www.shawcontractgroup.com or call 877-502-SHAW.

shaw contract group

© 2012 Shaw, a Berkshire Hathaway Company

tile specifications

style name	blend tile
style number	5T025
construction	multi-level pattern cut/loop
fiber	eco solution q® nylon
dye method	50% solution dyed / 50% yarn dyed

english

metric

	english	metric
pattern repeat		
tufted weight	34.0	1,152.80 g/m ²
gauge	1/12	47.24 per 10 cm
stitches per inch	11.0	43.31 per 10 cm
finished pile thickness	0.162	4.11 mm
total thickness	0.299	7.59 mm
average density	7556	14.07 kilotex
product size	24" x 24"	60.96 cm x 60.96 cm
primary backing	synthetic	
secondary backing	ecoworx® tile	
protective treatments	ssp® shaw soil protection	
gsa approved product	yes	




testing

radiant panel	Class I
nbs smoke	less than 450
electrostatic propensity	less than 3.5 kv

warranties

lifetime commercial limited

installation method

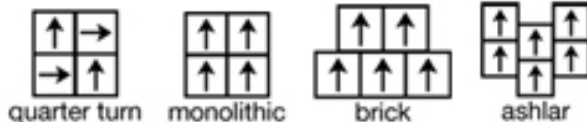

coordinating products

technique tile, vanish tile, blend tile

environmental certification

nsf140 platinum
cradle to cradle silver certified



eco impacts

end of life

recyclability	100% recyclable
shaw closed looped recycling	100.0%
environmental guarantee	free pick up & recycling

To recycle call 800.509.SHAW

materials

ingredients

face fiber	nylon 6
dye method	93% solution dyed / 7% yarn dyed
backing	polyolefin composite
surface treatments	non c8 fluorocarbon chemistry
does not contain PVC, phthalates, or PBD/PBDE	

recycled content

total recycled content (by weight)	44.5 %
pre-consumer	31.1 %
post-consumer	13.4 %
bio-based/rapidly renewable content (by weight)	0.0 %
packaging	100% recyclable
country of origin (manufacturer)	USA

Meets or exceeds all local and national regulations in country of manufacture.
 Manufactured in an ISO9001 & ISO14001 certified facility or equivalent.
 Recycled content is calculated using system allocation, mass balance, and direct insertion.
 The actual recycled content in this product will likely vary. For more information email
info@shawgreenedge.com.

third party certifications

MBDC cradle to cradle	silver certified
NSF 140	platinum certified
CRI green label plus	certified glp9968
USGBC LEED	contributes
Building Research Establishment	certified
Good Environmental Choice Australia	certified
Good Environmental Choice New Zealand	certified
Singapore green label	certified 039-003

social responsibility

Shaw and our people provide financial support, volunteer service and leadership for charitable and civic organizations in the communities where we work and live. Additionally, we strive to adhere to all applicable laws regarding labor, discrimination and harassment, wages and benefits, health and safety, diversity and equal opportunity.