



broadloom



tile

RENEW

DESIGN IS TEXTURED

**shaw** contract group





align tile



sculpt tile




trace tile



layer



dimension

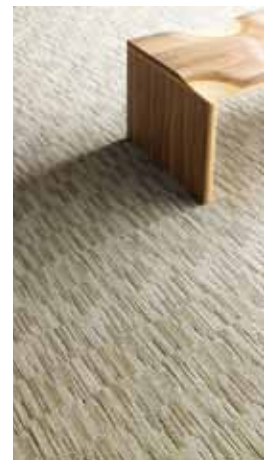


# take on TEXTURE.

Simple lines, rugged shapes. REWOVEN is topographic to the touch. Trace, Align and Sculpt in EcoWorx® tile. Layer and Dimension in Ultraloc Pattern® broadloom. All Cradle to Cradle Silver Certified and engineered for the unpredictable.


shown in layer



bisque 83111



cork 83170




suede 83755




swept 83322




nuance 83314



night 83496




brazen 83803




canyon 83750




clay 83761



zinc 83515



carbon 83585



underground 83505

## product specifications

	Broadloom	Tile
<b>Face weight:</b>	layer: 22 oz dimension: 22 oz	align: 20 oz sculpt: 20 oz trace: 20 oz
<b>Fiber:</b>	Eco Solution Q®	Eco Solution Q®
<b>Backing:</b>	Ultraloc® Pattern	EcoWorx®



For more information on **REWOVEN** contact your local Shaw Contract Group representative, visit us at [www.shawcontractgroup.com](http://www.shawcontractgroup.com) or call 877-502-SHAW.

**shaw** contract group®

© 2012 Shaw, a Berkshire Hathaway Company

## tile specifications

style name	sculpt tile
style number	5T007
construction	multi-level pattern cut/loop
fiber	eco solution q® nylon
dye method	100% solution dyed

	english	metric
-----		
pattern repeat	none	
tufted weight	20.0	678.11 g/m <sup>2</sup>
gauge	1/10	39.37 per 10 cm
stitches per inch	13.0	51.18 per 10 cm
finished pile thickness	0.129	3.28 mm
total thickness	0.249	6.32 mm
average density	5581	10.39 kilotex
product size	24" x 24"	60.96 cm x 60.96 cm
primary backing	synthetic	
secondary backing	ecoworx® tile	
protective treatments	ssp® shaw soil protection	


## testing

radiant panel	Class I
nbs smoke	less than 450
electrostatic propensity	less than 3.5kv

## warranties

lifetime commercial limited

## installation method

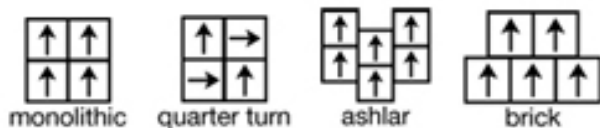

## coordinating products

layer, dimension, trace tile, align tile

## environmental certification

green label plus certification number	glp 9968
nsf140 platinum	
cradle to cradle silver certified	



## eco impacts

### end of life

#### recyclability

100% recyclable

#### shaw closed looped recycling

100.0%

#### environmental guarantee

free pick up &amp; recycling

To recycle call 800.509.SHAW

### materials

#### ingredients

face fiber

nylon 6

dye method

100% solution dyed

backing

polyolefin composite

surface treatments

non c8 fluorocarbon chemistry

does not contain PVC, phthalates, or PBD/PBDE

#### recycled content

total recycled content (by weight)

44.4 %

pre-consumer

32.7 %

post-consumer

11.7 %

bio-based/rapidly renewable content (by weight)

0.0 %

packaging

100% recyclable

country of origin (manufacturer)

USA

Meets or exceeds all local and national regulations in country of manufacture.

Manufactured in an ISO9001 &amp; ISO14001 certified facility or equivalent.

Recycled content is calculated using system allocation, mass balance, and direct insertion.

The actual recycled content in this product will likely vary. For more information email

info@shawgreenedge.com.

### third party certifications

MBDC cradle to cradle

silver certified

NSF 140

platinum certified

CRI green label plus

certified glp9968

USGBC LEED

contributes

Good Environmental Choice Australia

certified

Good Environmental Choice New Zealand

certified

Singapore green label

certified 039-003

### social responsibility

Shaw and our people provide financial support, volunteer service and leadership for charitable and civic organizations in the communities where we work and live. Additionally, we strive to adhere to all applicable laws regarding labor, discrimination and harassment, wages and benefits, health and safety, diversity and equal opportunity.